


Station	Side	AA	WL	TA	L	Anchored	W	Remarks
		Feet	Feet	Feet	Feet	X	Ft-Inches	
389+13.21	LT	25	25	25	175		13-5	
389+13.21	RT	25	25	25	175		13-5	
729+58.61	LT	25	25	25	175		16-0	
729+58.61	RT	25	25	25	175		16-0	
760+79.00	LT	25	37.5	25	187.5		13-0	
760+79.00	RT	25	37.5	25	187.5		13-0	
973+44.77	RT	25	25	25	175		15-0	

BARRIER OFFSETS FOR FLARE SECTIONS

TEMPORARY CONCRETE BARRIER LAYOUT for Two-Way Traffic

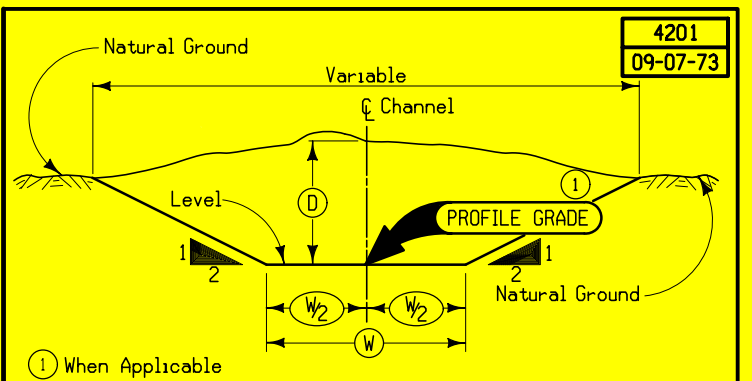

TYPICAL CROSS SECTION TYPE 1 CHANNEL

LOCATION		WIDTH	DEPTH (Average)
STATION	SIDE	W	D
973+43.00	LT	4'	3'
973+43.00	RT	4'	3'
1085+57.37	RT	4'	4'
973+43.00	RT	4'	4'